

# C DC Motors

DC Motor 40W(□80mm)


## 40W DC Motor 40W(□80mm)

### Motor Specification

Model 8DCG(W)□-40-30: Gear Type Shaft 8DCD□-40-30: D-Cut Type Shaft	Output W	Voltage V	Starting Current A	Starting Torque		No Load		Rated Load			
				kgfcm	N.m	Current A	Speed r/min	Current A	Speed r/min	Torque kgfcm N.m	
8DCG(W)12-40-30	40	12	47.00	15.00	1.500	1.50	3300	4.80	3000	1.30	0.130
8DCG(W)24-40-30	40	24	37.00	23.00	2.300	0.60	3250	1.90	3000	1.30	0.130
8DCG(W)90-40-30	40	90	1.50	24.00	2.400	0.03	3400	0.60	3000	1.30	0.130

- 1) Enter the phase & voltage code in the in the box (□) within the motor model name.
- 2) Gear Type Shaft are for attaching Gearbox and D-Cut Type Shaft are for using motor only.

### Performance Curve

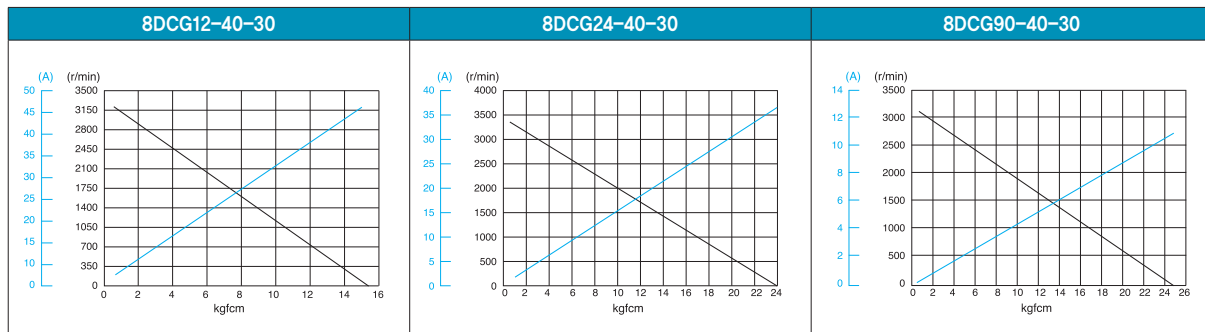

### Max. Permissible Torque at Output Shaft of Gearbox

Motor Model	Gearbox Model	Gear Ratio r/min	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180	200	250	300	360			
			1000	833	600	500	400	333	240	200	167	120	100	83	75	60	50	40	33	30	25	20	17	15	12	10	8			
8DCG□ -40-30	8GBK□ BMH	Rated	kgfcm	3.2	3.9	5.4	6.5	8.1	9.7	13.5	16.2	19.4	24.4	29.3	31.8	35.4	44.2	53.0	66.3	79.6	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0		
		N.m	0.32	0.38	0.53	0.63	0.79	0.95	1.32	1.59	1.90	2.39	2.87	3.12	3.47	4.33	5.20	6.50	7.80	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84		
		12V	kgfcm	37.4	44.8	62.3	74.7	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
		Starting	N.m	3.66	4.39	6.10	7.32	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84
		24V	kgfcm	57.3	68.7	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0


Motor Model	Gearbox Model	Gear Ratio		10	12	15	18	25	30	36	50	60	
		r/min	r/min	300	250	200	167	120	100	83	60	50	
8DCW□-40-30	8WD□BL/□BR/ □BRL	Rated	kgfcm	10.7	12.5	15.0	17.3	22.8	25.7	30.0	39.0	42.9	
		N.m	1.0	1.22	1.47	1.70	2.23	2.52	2.94	3.82	4.20		
		12V	kgfcm	112.2	102.0	112.2	102.0	102.0	102.0	102.0	102.0	102.0	81.6
		Starting	N.m	11.0	10.00	11.00	10.00	10.00	10.00	10.00	10.00	10.00	8.00
		24V	kgfcm	112.2	102.0	112.2	102.0	102.0	102.0	102.0	102.0	102.0	81.6

- 1) Enter the phase & voltage code in the box (□) within the motor model name.
- 2) Enter the gear ratio in the box (□) within the Gearbox model name.
- 3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.
- 4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.  
The actual speed is 2~20% less than the displayed value, depending on the size of the load.

## Dimensions

### MOTOR ONLY

- MOTOR MODEL: 8DCD□-40-30

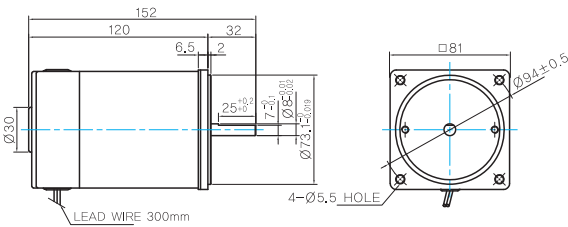


### MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	

### INTER-DECIMAL GEARBOX

- MODEL: 8XD10□□

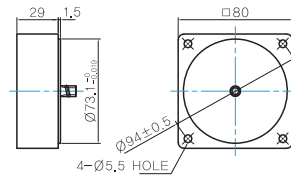

## GEARED MOTOR


### G TYPE GEARBOX

- MOTOR MODEL: 8DCG□-40-30

- GEARBOX MODEL: 8GBK□BMH

### GEARBOX OUTPUT SHAFT


- 32(42.5)-Table1

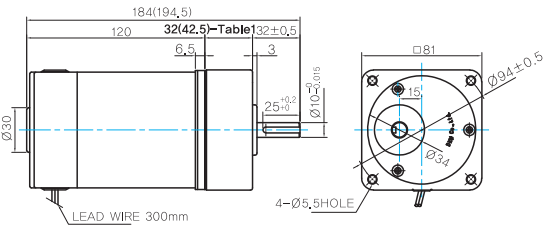

MODEL	SPEC
KEY TYPE	

SIZE(mm)	GEAR RATIO
32	8GBK3BMH ~ 8GBK18BMH
42.5	8GBK25BMH ~ 8GBK360BMH

### KEY SPEC




### W TYPE GEARBOX

- MOTOR MODEL: 8DCW□-40-30

- GEARBOX MODEL: 8WD□BL/BR/BRL

### KEY SPEC

### WEIGHT

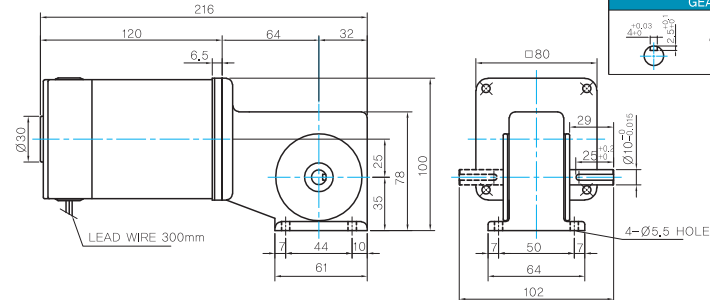

GEARBOX

PART	WEIGHT(kg)	
MOTOR	1,5	
GEAR BOX	8GBK3BMH ~ 8GBK18BMH	0,48
	8GBK25BMH ~ 8GBK30BMH	0,61
	8GBK36BMH ~ 8GBK180BMH	0,67
	8GBK200BMH ~ 8GBK360BMH	0,63
	8WD□BL/BR/BRL	0,67
8XD10□□	0,44	

## Motor Images

