

B AC Motors

S.C. Reversible Motor 15W (□80mm)

15W Speed Control Reversible Motor 15W(□80mm)

Motor Specification

Model 8SRDG*-15□: Gear Type Shaft 8SRDD*-15: D-Cut Type Shaft	Output W	Voltage V	Frequency Hz	Poles	Duty	Speed Range r/min	Starting Torque		Permissible Torque				Capacitor μF / VAC
									1200r/min		90r/min		
									kgfcm	N.m	kgfcm	N.m	
8SRDGA-15□	15	1φ110	60	4	30min.	90-1700	0.70	0.070	1.50	0.150	0.60	0.060	6.0 / 450
8SRDGD-15□	15	1φ220	60	4	30min.	90-1700	0.85	0.085	1.50	0.150	0.55	0.055	1.5 / 450
8SRDGE-15□	15	1φ220	50	4	30min.	90-1400	0.75	0.075	1.20	0.120	0.50	0.050	1.5 / 450
		0.85					0.085	1.40	0.140	0.50	0.050		

1) Enter the phase & voltage code in the place * and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft are for attaching Gearbox and D-Cut Type Shaft are for using motor only.

Max. Permissible Torque at Output Shaft of Gearbox

Motor Model	Gearbox Model	r/min	V	Hz	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	40	50	60	75	90	100	120	150	180	200	250	300	360		
8SRDG□ -15G	8GBK□ BMH	1200	110	60	kgfcm	3.7	4.5	6.2	7.5	9.3	11.2	15.6	18.7	22.4	28.1	33.8	36.7	40.8	51.0	61.2	76.5	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	
					N.m	0.37	0.44	0.61	0.73	0.92	1.10	1.53	1.83	2.20	2.76	3.31	3.60	4.00	5.00	6.00	7.50	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84
			220	60	kgfcm	3.7	4.5	6.2	7.5	9.3	11.2	15.6	18.7	22.4	28.1	33.8	36.7	40.8	51.0	61.2	76.5	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
		220/240	50	kgfcm	3.5	4.2	5.8	7.0	8.7	10.5	14.5	17.4	20.9	26.3	31.5	34.3	38.1	47.6	57.1	71.4	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0
		N.m	0.34	0.41	0.57	0.68	0.85	1.02	1.42	1.71	2.05	2.57	3.09	3.36	3.73	4.66	5.60	7.00	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84	7.84
		90	60	kgfcm	0.9	1.0	1.5	1.7	2.2	2.6	3.6	4.4	5.2	6.6	7.9	8.6	9.5	11.9	14.3	17.9	21.4	23.8	28.6	35.7	42.8	42.7	53.4	64.1	76.9	76.9	76.9	76.9
N.m	0.09	0.10	0.14	0.17	0.21	0.26	0.36	0.43	0.51	0.64	0.77	0.84	0.93	1.17	1.40	1.75	2.10	2.33	2.80	3.50	4.20	4.18	5.23	6.28	7.53	7.53	7.53	7.53	7.53	7.53		
220/240	50	kgfcm	0.9	1.0	1.5	1.7	2.2	2.6	3.6	4.4	5.2	6.6	7.9	8.6	9.5	11.9	14.3	17.9	21.4	23.8	28.6	35.7	42.8	42.7	53.4	64.1	76.9	76.9	76.9	76.9	76.9	
N.m	0.09	0.10	0.14	0.17	0.21	0.26	0.36	0.43	0.51	0.64	0.77	0.84	0.93	1.17	1.40	1.75	2.10	2.33	2.80	3.50	4.20	4.18	5.23	6.28	7.53	7.53	7.53	7.53	7.53	7.53		

Motor Model	Gearbox Model	r/min	V	Hz	Gear Ratio	10	12	15	18	25	30	36	50	60
8SRDG□ -15W	8WD□BL/ BR□BRL	1200	110	60	kgfcm	12.3	14.4	17.3	20.0	26.3	29.7	34.6	45.0	49.5
					N.m	1.21	1.41	1.70	1.96	2.57	2.91	3.39	4.41	4.85
			220	60	kgfcm	12.5	14.9	18.7	22.4	31.1	37.4	44.8	62.3	74.7
		N.m	1.22	1.46	1.83	2.20	3.05	3.66	4.39	6.10	7.32			
		220/240	50	kgfcm	11.5	13.4	16.2	18.6	24.5	27.7	32.3	42.0	46.2	
		N.m	1.13	1.32	1.58	1.83	2.40	2.72	3.16	4.12	4.53			
90	60	kgfcm	2.9	3.4	4.0	4.7	6.1	6.9	8.1	10.5	11.6			
N.m	0.28	0.33	0.40	0.46	0.60	0.68	0.79	1.03	1.13					
220/240	50	kgfcm	2.9	3.4	4.0	4.7	6.1	6.9	8.1	10.5	11.6			
N.m	0.28	0.33	0.40	0.46	0.60	0.68	0.79	1.03	1.13					

1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.

3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.


4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio.

The actual speed is 2~20% less than the displayed value, depending on the size of the load.

B AC Motors

S.C. Reversible Motor 15W (□80mm)

Connection Diagrams

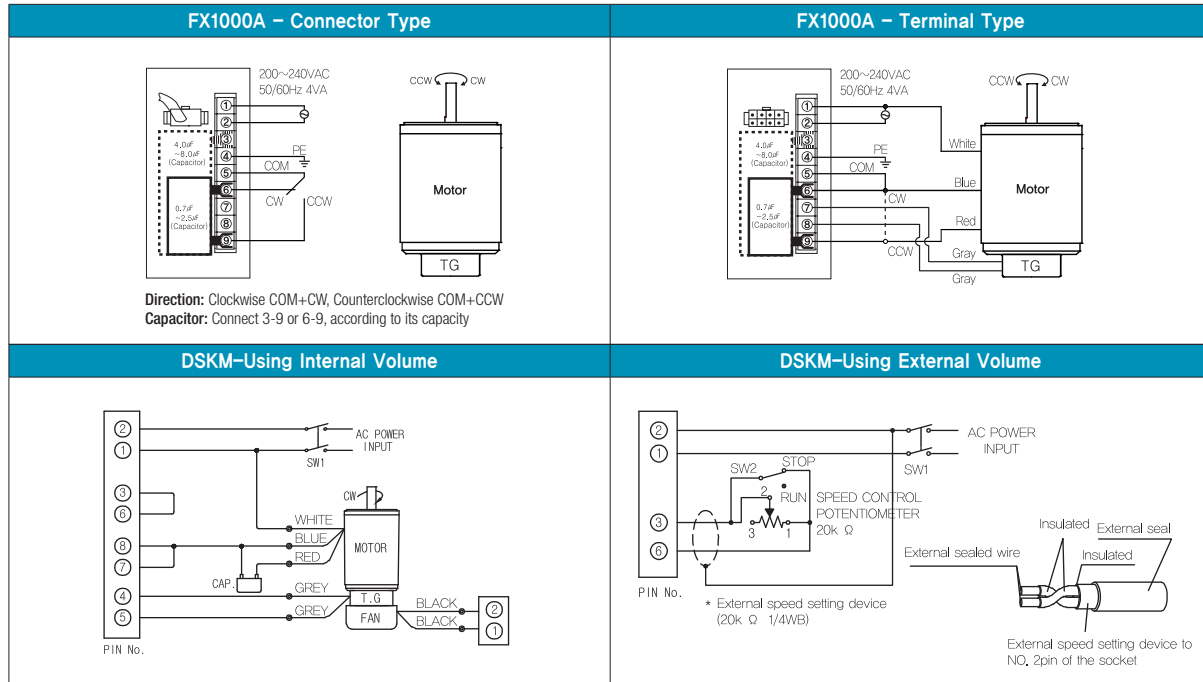

- 1) At first connect the speed controller with the motor as instructed in connection diagrams. And then input the external power to both of the terminal 'AC' for the rated speed operation.
Now you can adjust the main volume to control the output speed of motor.
- 2) The direction of motor rotation is as viewed from the shaft end of the motor.
- 3) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 4) When using powerful fan (F2 type) attached motor, connect two black wires of the fan to No.1 and No.2 terminals in order to supply power.